


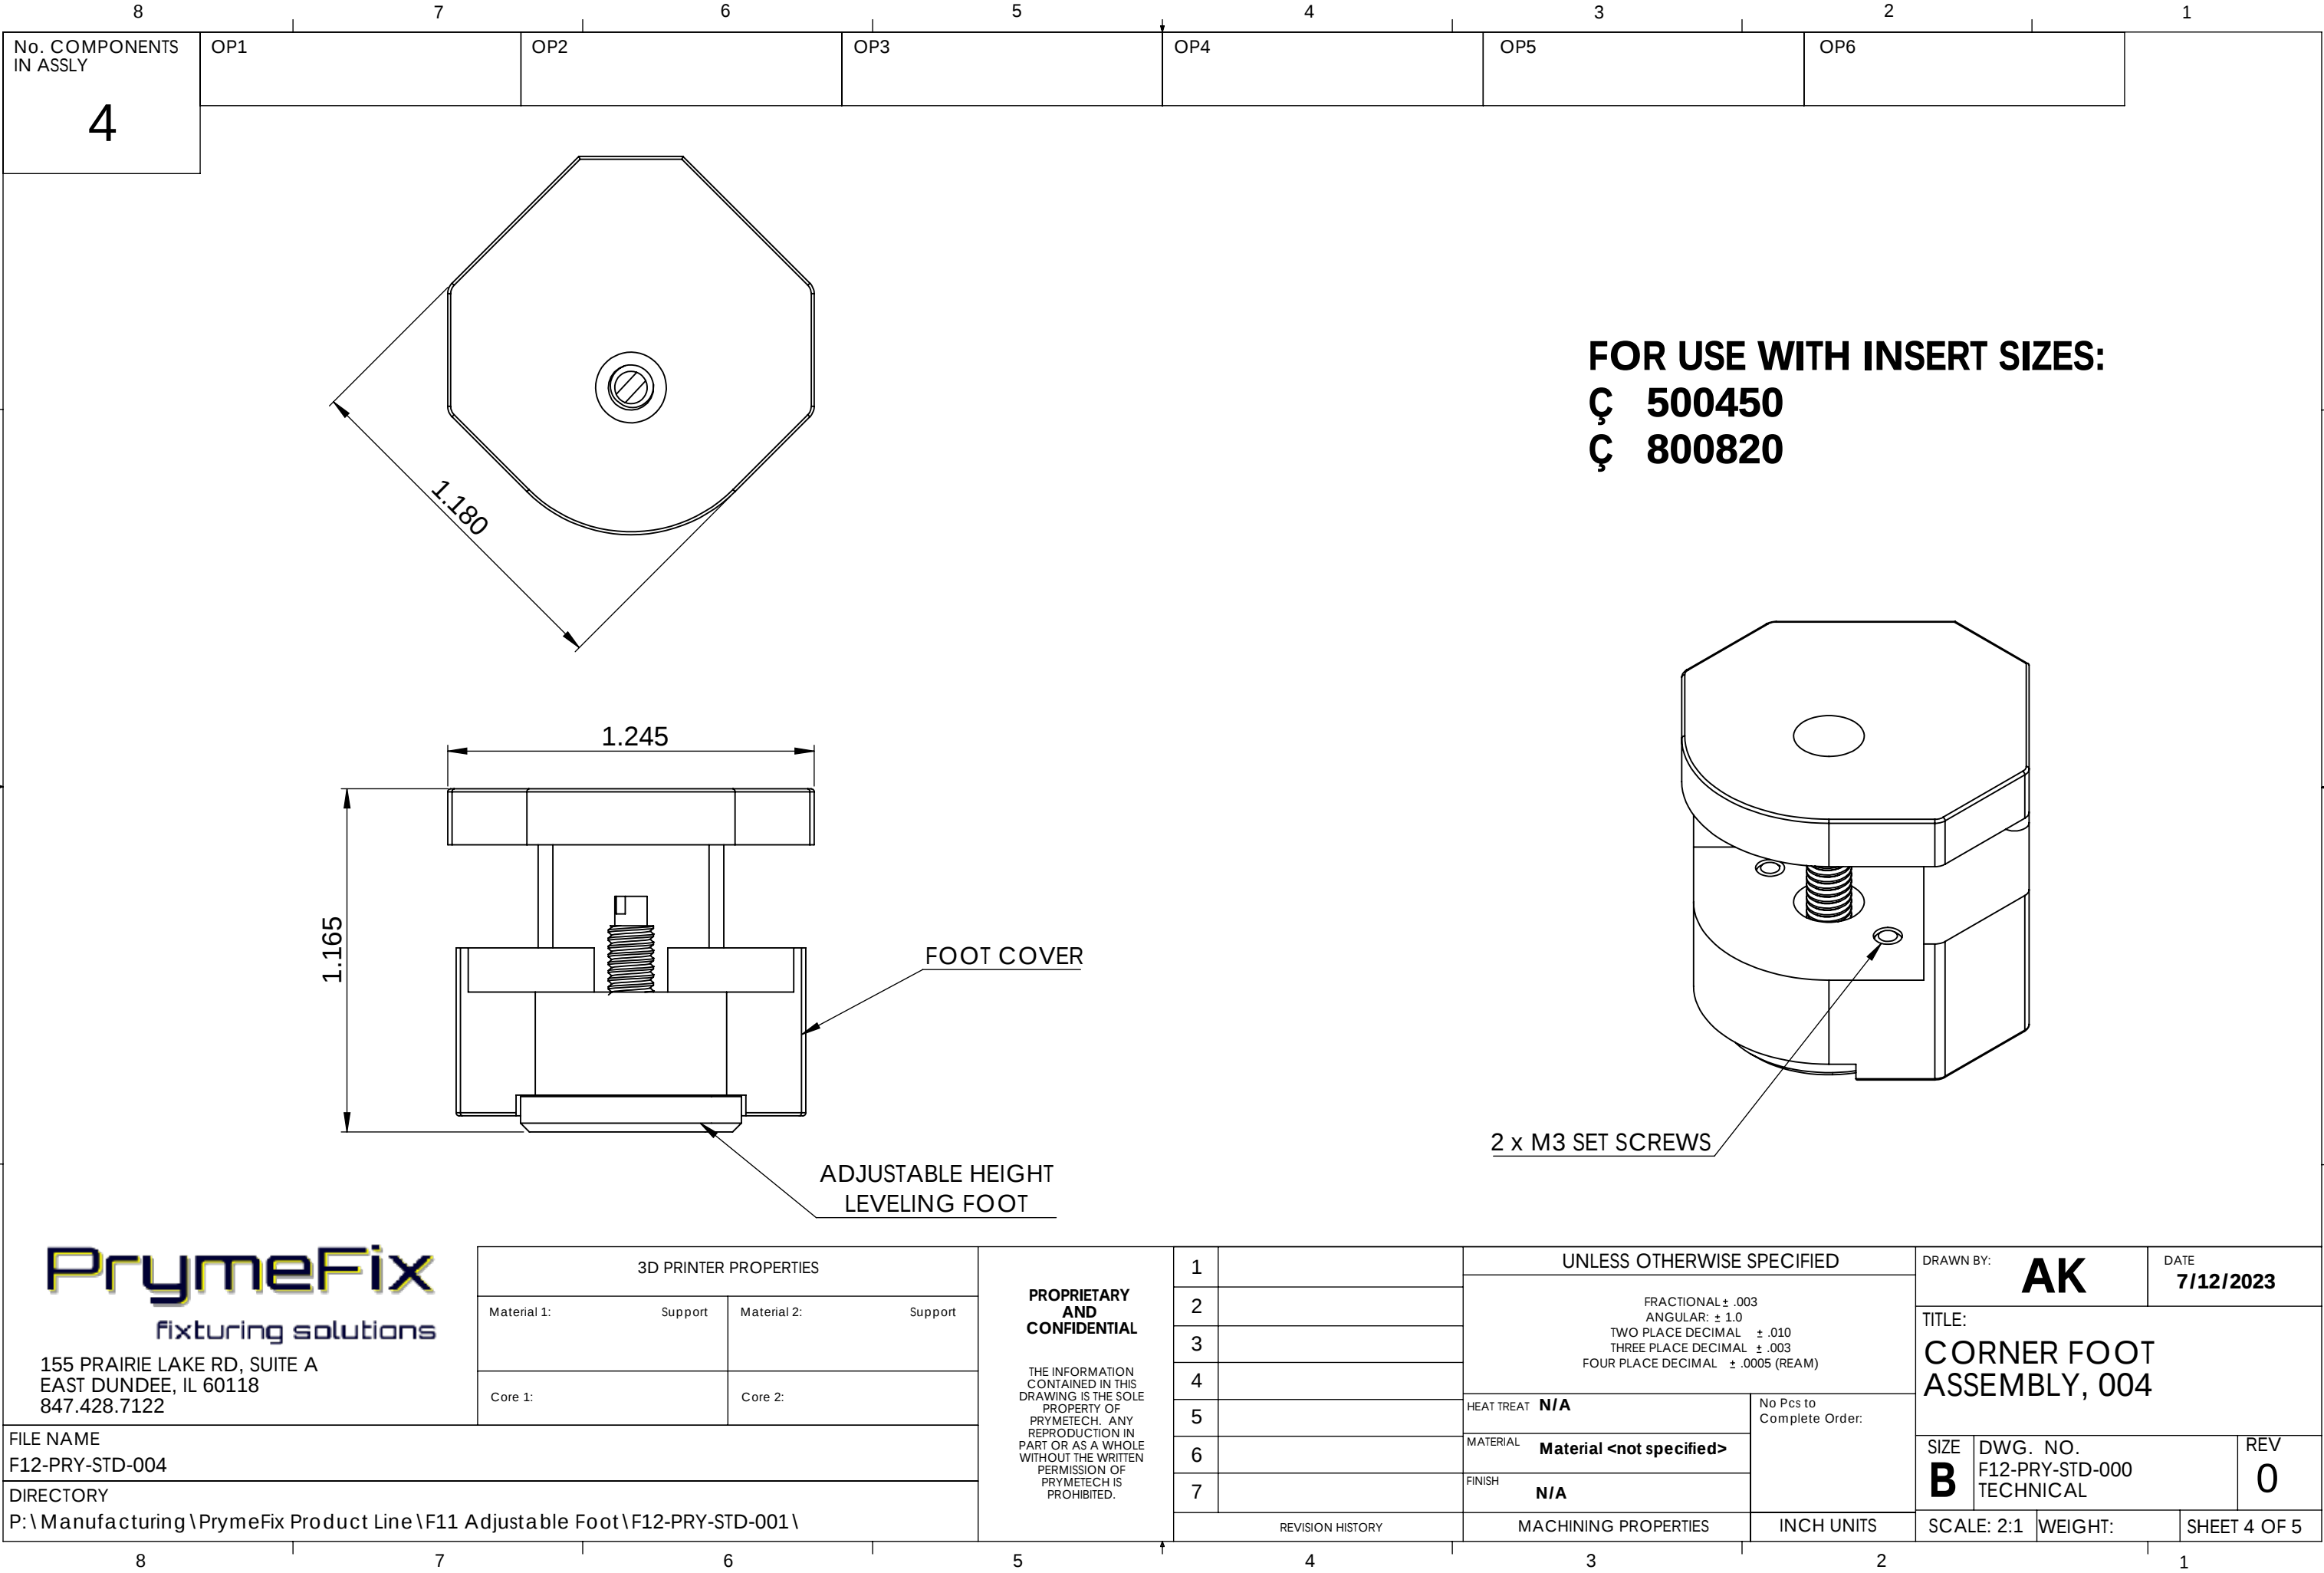

8 7 6 5 4 3 2 1

No. COMPONENTS
IN ASSLY

2

OP1

OP2

OP3

OP4

OP5

OP6

1.075

1.165

005-R

005-L

FOR USE WITH INSERT SIZES:
Ç 150075

2 x M3 SET SCREWS

0.810

FOOT COVER

ADJUSTABLE HEIGHT
LEVELING FOOT

PRYMEFIX

fixturing solutions

155 PRAIRIE LAKE RD, SUITE A
EAST DUNDEE, IL 60118
847.428.7122

FILE NAME

F12-PRY-STD-005-L

DIRECTORY

P:\Manufacturing\PrymeFix Product Line\F11 Adjustable Foot\F12-PRY-STD-001\

3D PRINTER PROPERTIES

Material 1:Support

Material 2:Support

Core 1:

Core 2:

PROPRIETARY
AND
CONFIDENTIAL

THE INFORMATION
CONTAINED IN THIS
DRAWING IS THE SOLE
PROPERTY OF
PRYMETECH. ANY
REPRODUCTION IN
PART OR AS A WHOLE
WITHOUT THE WRITTEN
PERMISSION OF
PRYMETECH IS
PROHIBITED.

1

2

3

4

5

6

7

UNLESS OTHERWISE SPECIFIED

FRACTIONAL ± .003

ANGULAR: ± 1.0

TWO PLACE DECIMAL ± .010

THREE PLACE DECIMAL ± .003

FOUR PLACE DECIMAL ± .0005 (REAM)

HEAT TREATN/A

MATERIALMaterial <not specified>

FINISHN/A

2 x M3 SET SCREWS

0.810

REVISION HISTORY

MACHINING PROPERTIES

INCH UNITS

DRAWN BY:AK

DATE7/12/2023

TITLE:

CORNER FOOT
ASSEMBLY, 005-L&R

SIZEB

DWG. NO.
F12-PRY-STD-000
TECHNICAL

REV0

SCALE: 2:1

WEIGHT:

SHEET 5 OF 5

8 7 6 5 4 3 2 1